

## HEATING, VENTING AND COOLING

## Air Conditioner Filter



Use this fiberglass filter in air-conditioning, heating and ventilation systems in which the face velocity of the air stream is approximately 300' per minute. Filters dust and lint from air. Disposable, panel-type filter has retainers on both sides. A-A-1419.

4130-00-870-8796	JWOD	18 x 20 x 1"	DZ	\$12.75
4130-00-274-7800	JWOD	18 x 20 x 2"	DZ	\$17.47
4130-00-541-3220	JWOD	18 x 25 x 1"	DZ	\$13.84
4130-00-756-1840	JWOD	18 x 25 x 2"	DZ	\$18.64
4130-00-720-4143	JWOD	20 x 20 x 1"	DZ	\$16.10
4130-00-249-0966	JWOD	20 x 20 x 2"	DZ	\$18.70
4130-00-203-3318	JWOD	20 x 25 x 1"	DZ	\$15.21
4130-00-203-3321	JWOD	20 x 25 x 2"	DZ	\$22.24

## What's Best Value?

**"We think best value is a combination of service, quality and price, and that's how we define the Customer Supply Center program."**

## Ceiling Fan

Ceiling fan with three speeds. Electric motor 120 Volts 60 Hz, single phase. Reversible Motor; 25 Weight lbs. White with white blades.

4140-01-388-9958	42"	EA	\$78.15
------------------	-----	----	---------

52" white motor with four white blades and white irons. 3 speeds.

4140-01-388-9922	52" three speed	EA	\$85.00
------------------	-----------------	----	---------

52" white motor with reversible white/pickled oak switchblades and white irons. 3 speeds.

4140-01-388-9949		EA	\$101.45
------------------	--	----	----------

52" brass with four walnut/oak blades and brass irons. Reversible motor with 3 speeds.

4140-01-388-9934		EA	\$89.12
------------------	--	----	---------

## Circulating Fan

Keep cool with this three-speed oscillating fan, featuring push-button controls for low, medium and high speeds. Made with three plastic blades and a three-wire 8' electrical cord. Operates on 115v AC, 60-Hz, single-phase power. Conforms to UL standards. A-A-1939.



Desk fan has a 12" diameter blade assembly.

4140-00-256-9912

EA \$26.89



Desk or wall-mounting fan has a 16" diameter blade assembly. Head tilts.

4140-00-851-9319

EA \$40.05

**In our on-going efforts to fulfill your supply needs and provide you with quality products at cost-saving prices, we now offer a wider range of products than ever before. Check out our expanded inventory!**



Stay cool. Column-mounted, two-speed pedestal fan adjusts to heights from 54 to 84". Nonoscillating fan head is locked in a 20 deg. tilt so that air is blown in one direction only. It has 30" rigid plastic blades and a safety guard that completely covers the blade assembly. Fan operates on 110 to 120v AC, 60-cycle power and has a three-conductor power cord. Conforms to UL standards. A-A-1941.

4140-00-833-5068

EA \$180.77



Beat the heat with this high-velocity, two-speed fan. Use on floor, desk or wall as an air circulator, or in a window for exhaust or intake purposes. Plastic blades circulate up to 2500 cfm of air in any direction at a 180 deg. tilt. Tubular frame has safety guard. Fan is free from radio interference. Operates on 110 to 120v AC, 60-cycle power and has a 10'-long three-conductor cord and plug. Conforms to UL standards. A-A-1943B.

4140-00-961-5480

20 x 19 x 13"

EA \$35.45

Stay cool with this column-mounted, two or three-speed pedestal fan that adjusts to height from 54" to 84". Oscillates a minimum of 80 degrees and can be locked at any point on that oscillation range. Head of fan tilts 5 degrees below and 15 degrees above horizontal. to blow air in a clockwise direction. A safety guard completely covers the metal or rigid plastic blade assembly. Fan operates on 115v AC, 60-Hz power and has a three-conductor 10' power cord. Conforms to UL standards. A-A-3008.

4140-01-278-3874

24" blade

EA \$198.36

Designed to improve air circulation at floor level. Two-speed hassock fan includes a rotary switch to select low or high speed, a 10' two-wire electrical cord and a polished three-blade assembly (12" diameter). Continuous-duty electric motor operates on 120v AC, 60-Hz, single-phase power. Conforms to UL standards. A-A-1942.

4140-00-203-3807

EA \$61.24



Stay cool with this column-mounted, three-speed pedestal fan that adjusts to heights from 54 to 84. Oscillates to blow air in a clockwise direction. A safety guard completely covers the rigid plastic blade assembly. Fan operates on 115v AC, 60-Hz power and has a three-conductor power cord. Conforms to UL standards.

4140-01-278-1527

EA \$207.83

**We're open 7:30 am to 8:00 pm Eastern time  
to take your calls.**




Lightweight, portable electric fan clips into most tables, shelves or chairs. The multi-directional tilt adjusts easily. Has a 6" retrievable power cord. Two-speed.

4140-01-416-4898

Beige 6" dimension

EA \$10.94

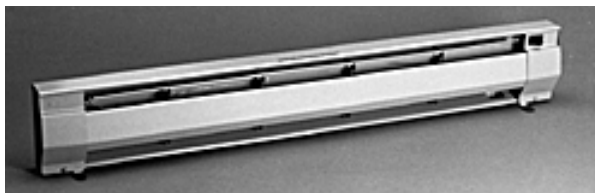**Space Heater**

Portable electric space heater heats small rooms or areas. Features include a convenient carrying handle and a protective grill. Automatic thermostat control ranges from 45 to 120 deg.F. Heater conforms to UL standards. All dimensions are approximate.

Baseboard-style heater is natural convection type. It has rod-type elements with heat-radiating metal fins. Single wattage unit is 120v AC, 1000w; with a three-prong plug. A tip-over switch automatically turns unit off when it is overturned. Has a minimum 5'-long, 15-amp rated plug and cord. NEMA configuration 5-15P.

**4520-00-865-5939**

6-1/2 x 47-1/2 x 4-1/4"

EA **\$46.51**

Upright-style forced-air model comes in handy as a spot heater. It has a convection heating element of chrome-nickel wire and a fan for heat circulation. Heater has a positive on-off manual switch and "off" position marked on thermostat.

*Fan operates on 240v AC power; 3000w produces 10,200 Btu per hour. Heater does not have a tip-over switch; thermostat is adjustable. Has a three-prong grounding plug and a minimum 5'-long, 20-amp rated plug and cord. NEMA configuration 6-20P.*

**4520-00-540-2038**

17-1/2 x 18-3/4 x 9"

EA **\$85.46**

*Fan operates on 120v AC power; 1250w minimum produces 5600 Btu per hour. A tip-over switch automatically turns unit off when it is overturned. Has a three-prong plug and a minimum 5'-long, 15-amp rated plug and cord. NEMA configuration 5-15P.*

**4520-00-555-8696**

15-1/2 x 14 x 6"

EA **\$32.28****Thermometer**

Thermometer has a self-indicating bimetallic dial.

**6685-01-092-3911**EA **\$6.29**

Thermometer is self-indicating and bimetallic. Has a steel meter case and black markings on white background. Straight form horizontal dial.

Calibrated for use in freezers and refrigerators. Dial has a range from 20.000 to 80.000 deg F.

**6685-00-562-7902**

Black/White

EA **\$5.48**

Calibrated from 200.00 to 400.00 deg F. Features a pre-set adjustable dial indicator marked for proper temperature for cooking candy and deep frying.

**6685-00-585-5678**EA **\$6.26**

Dual magnet surface thermometer has a temperature range of 0 to 500deg. F. Features two built-in clamping magnets for mounting.

**6685-01-103-0379**

2" diameter

EA **\$32.15**

Indoor thermometer can be displayed on a wall.

**6685-00-889-7444**EA **\$8.53**


KITCHEN APPLIANCES

Water Cooler



Water cooler quenches your thirst with electronically cooled water and features a self-closing faucet. A 5-gal inverted glass bottle (not included) supplies water by the force of gravity. Freestanding unit has an all-steel with baked enamel finish and an air-cooled condenser; freon coolant. Use only when pressure-type dispensers are impractical. With receptacle for waste water; no drain line required. Operates on 110 to 120v AC, 60-Hz power and has a three-wire cord. Meets UL and industry standards. Certified lead free by the manufacturer. A-A-1153.

4110-00-203-0565 12-1/4 x 12-1/4 x 38-1/2" EA \$186.86

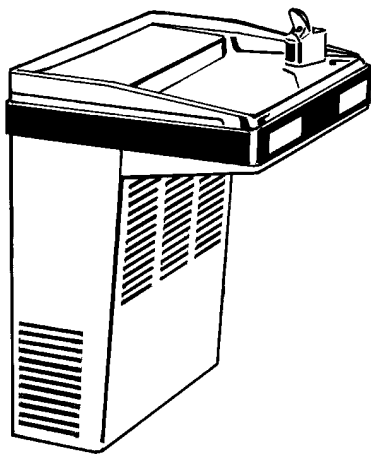

Mechanically cooled water fountain mounts on the wall. This barrier-free unit uses a single valve to control flow of water so that it may be consumed directly from fountain without glasses or cups. Handicapped accessible and lead free, the dispenser uses bubbler-type pressure to produce 6 gal per hour. Compressor runs on 115v, 60-Hz, single-phase power. A-A-2590.

4110-01-280-0178 12-1/4 x 12-1/4 x 38-1/2" EA \$314.67




Fresh water at your fingertips. Bubbler-style drinking water dispenser gives a stream of water that arches from the outlet to the drain pan. Attaches to normal, pressurized water supply pipe. Electrically cooled unit has a self-closing faucet and is encased in a steel cabinet. With corrosion-resistant fittings and a three-wire cord. Operates on 110 to 120v AC, 60-Hz power. Meets UL and industry standards. Certified lead free by the manufacturer. Unit has an air-cooled condenser. A-A-1151.

Unit is wall mounting and has an air-cooled condenser. A-A-1151.

4110-00-782-5125 18 x 19 x 33" EA \$336.42

Buy Smart and Pay Smart with  
the new GSA SmartPay card, or  
your GSA charge account.

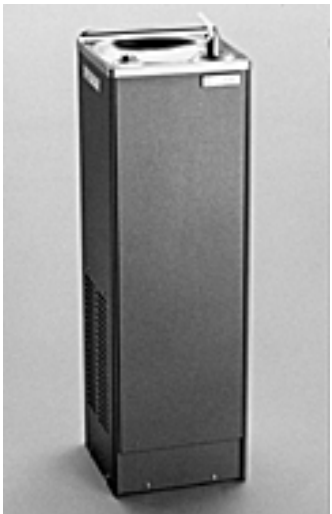

Freestanding unit.

Has an air-cooled condenser. CID A-A-1151.

4110-00-255-8760 14 x 14 x 41" EA \$252.20

Has a water-cooled condenser. A-A-1154.

4110-00-203-2706 14 x 14 x 41" EA \$345.46